





SECTION B-B

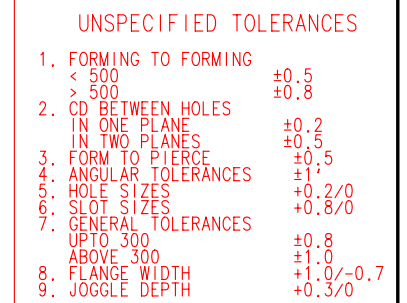

ISOMETRIC VIEW
SCALE 1:4

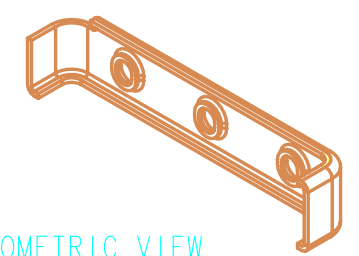

ER14C0002710	AB1	PRODUCTION RELEASE			AVA	OVK	RNM 01/07/14
	AB	c2,d3	TOLERANCES UPDATED AS PER CDMM FEEDBACK				
ECN12P014799	AA	DIM 210,R15 WERE 250,R20 CUTOUT ADDED, NOTE, WEIGHT & DEVELOPMENT LENGTH UPDATED.			AVA	OVK	RNM 30/11/12
E.R.NO.	LET	LOC	REVISIONS		DSNR	CKR.	APPR. DATE

<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS												
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.										MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.		
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989												
DIMENSIONS												
L INEAR IN mm.		OVER UPTO	0.5 3	3 6	6 30	30 120	400 400	1000 2000	2000 4000			
f	FINE	(X.XXX)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-		
m	MEDIUM	(X.XX)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2		
c	COARSE	(X.X)	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4		
v	VERY COARSE	(X)	-	±0.5	±1	±1.5	±2.5	±4	±6	±8		
ANGULAR IN deg.		LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.										
		OVER	-	10	50	120	400					
		UPTO	10	50	120	400	-					
f	FINE	(X.XXX)	±1°		±0°30'	±0°20'	±0°10'	±0°5'				
m	MEDIUM	(X.XX)	±1°30'		±1°	±0°30'	±0°15'	±0°10'				
c	COARSE	(X.X)	±3°		±2°	±1°	±0°30'	±0°20'				
v	VERY COARSE	(X)										
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.												
COMPUTER GENERATED DRAWING						DO NOT CHANGE MANUALLY						
IF IN DOUBT, ASK				DO NOT SCALE		DRG SIZE : A3		ALL DIMENSIONS ARE IN mm.				CHECK DRG WITH LATEST CHANGE No 0
E.R. / PROC.REQ.NO :		ER14C0002710		PART NO. :		007543911C1		PART NAME : FLOOR FRONT MTG CONNECTING BKT				
MATERIAL :		MM11D, 3.0 mm THK AS PER G 00 0169		HEAT TREATMENT : -----		2012 NAME SIGN DATE FIRST USED TRCR. MODEL M-STAR						
CAD ENGG.		N N K		7/08/2012		SCALE 1:1						
DESIGNER		O V K		7/08/2012		SHEET 1 OF 1						
CHECKER		O V K		7/08/2012		UNIT QTY. : 1						
APPR.BY		R N M		7/08/2012		WEIGHT : 0.294 kg.						